

Tape measure, self-adhesive


Design: Painted white, without fittings, lying flat, not curved.

Length m	Tape width mm	BMI MESSAGE	BMI MESSAGE	Order No.
		4663	4664	
2	13	11.55	14.15	...0002
5	13	16.75	21.00	...0005
10	13	32.80	–	...0010
		(W464)	(W464)	

BMI®



4663 left to right



4664 right right to left

Pocket tape measure BMImeter

Design: Rolls out automatically due to the special treatment of the stainless steel band. Convex curved. Painted white, completely waterproof and unbreakable. Tape lies flat on the table, therefore measurements can be transferred very well. Supplied with stopper and belt clip.

Length m	Tape width mm	BMI MESSAGE	Order No.
		4665	
2	16	6.95	...0002
3	16	9.45	...0003
		(W464)	

EG
II

BMI®



Pocket tape measure

Design: Made of curved and hardened spring steel with mm-Duplex graduations, in fibreglass-reinforced polyamide housing. The tape is baked in clear lacquer to protect it from wear. Automatic tape rewind with stop button, moveable end fitting for inner and outer measurements.

Length m	Tape width mm	format professional quality	Order No.
		4685	
2	13	6.30	...0002
3	13	7.00	...0003
5	16	12.95	...0005
		(W462)	

EG
II

format
professional quality



Pocket tape measure


Design: Made of curved and hardened steel with mm-Duplex graduations, in highly impact-resistant ABS plastic housing. The tape is baked in clear lacquer to protect it from wear. Automatic tape rewind with stop button, moveable end fitting for inner and outer measurements.

- 4474 Made of spring steel.
- 4458 Made of spring steel and with magnet on end fitting.
- 4456 Made of stainless steel.

Length m	Tape width mm	format professional quality	format professional quality	format professional quality	Order No.
		4474	4458	4456	
2	16	4.33	–	–	...0002
3	16	4.70	–	–	...0003
5	19	7.00	8.45	27.50	...0005
8	25	14.00	15.55	–	...0008
		(W469)	(W469)	(W469)	

EG
II

format
professional quality

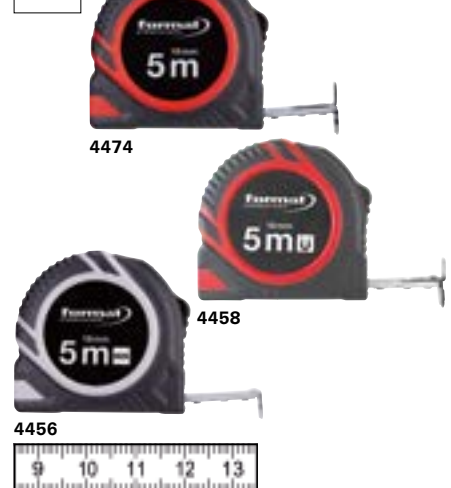

Pocket tape measure Autolock

Design: Made of curved and hardened steel with mm-Duplex graduations, in highly impact-resistant ABS plastic housing. The tape is baked in clear lacquer to protect it from wear. **With automatic stop when pulling out** and moveable end fitting for inner and outer measurements.

Length m	Tape width mm	format professional quality	Order No.
		4454	
3	19	6.15	...0003
5	22	9.55	...0005
8	27	18.60	...0008
		(W469)	

EG
II

format
professional quality

