

BUSSOLE DI RIDUZIONE A CONO MORSE CON BATTUTA



FIG. 1


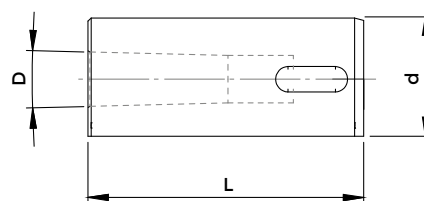


FIG. 2

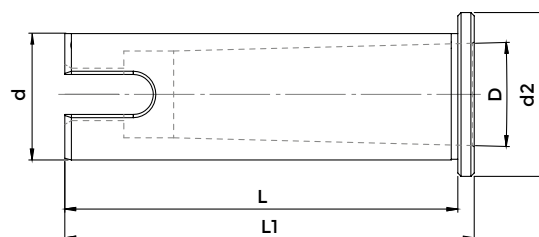

E 2.G6

COD.	DESCRIZIONE	d	CM	D	L	L1	d2	FIG.
1722	E2.G6 - 20 x 1	20	1	12,065	65	70	28	2
1723	E2.G6 - 20 x 2	20	2	17,78	70	75	28	2
1786	E2.G6 - 25 x 1	25	1	12,065	70	75	33	2
1787	E2.G6 - 25 x 2	25	2	17,78	70	75	33	2
1788	E2.G6 - 25 x 3	25	3	23,825	79	98	33	2
1376	E2.G6 - 32 x 1	32	1	12,065	85	90	40	1
1377	E2.G6 - 32 x 2	32	2	17,78	85	90	40	1
1378	E2.G6 - 32 x 3	32	3	23,825	95	100	40	2
3245	E2.G6 - 40 x 2	40	2	17,78	105	110	50	1
1232	E2.G6 - 40 x 3	40	3	23,825	105	110	50	1
5603	E2.G6 - 40 x 4	40	4	31,267	120	125	50	2
5961	E2.G6 - 50 x 2	50	2	17,78	125	130	63	1
5962	E2.G6 - 50 x 3	50	3	23,825	125	130	63	1
5963	E2.G6 - 50 x 4	50	4	31,267	125	130	63	1
8894	E2.G6 - 60 x 3	60	3	23,825	130	140	70	1
8895	E2.G6 - 60 x 4	60	4	31,267	130	140	70	1
8896	E2.G6 - 60 x 5	60	5	44,399	145	155	70	2