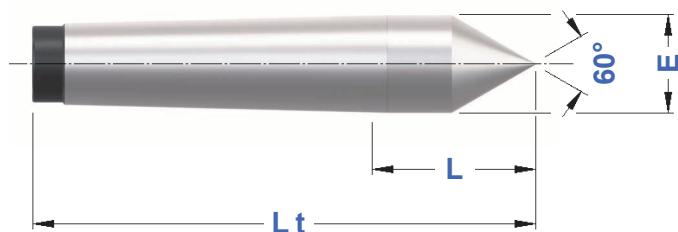


DIN 806**CONTROPUNTE ATTACCO CM IN ACCIAIO**

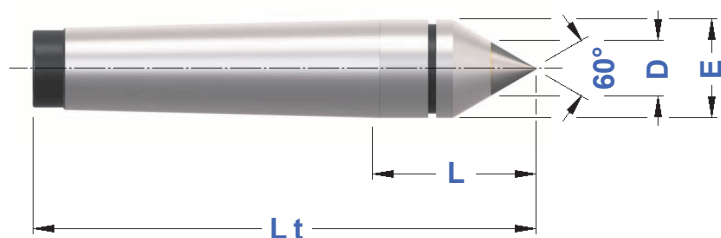
STEEL MORSE TAPER SHANK TAILSTOCKS

CP.A

TIPO	Art.	E	L	Lt
CP. A - CM 1	4335	12,2	26,5	80
CP. A - CM 2	4336	18,0	36,0	100
CP. A - CM 3	4337	24,1	44,0	125
CP. A - CM 4	4338	31,6	57,5	160
CP. A - CM 5	4339	44,7	70,5	200
CP. A - CM 6	8487	63,8	88,0	270

DIN 806**CONTROPUNTE ATTACCO CM CON METALLO DURO**

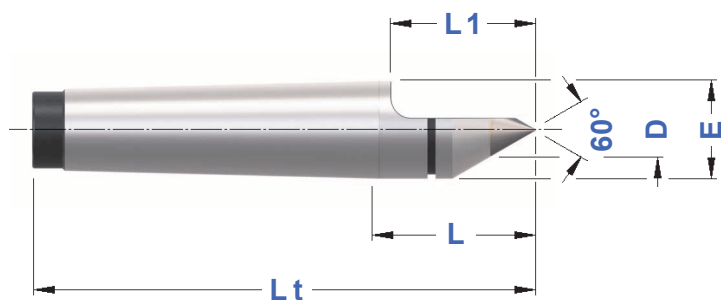
MORSE TAPER SHANK TAILSTOCKS WITH SOLID CARBIDE

CP.W

TIPO	Art.	D	E	L	Lt
CP. W - CM 1	3957	7	12,2	26,5	80
CP. W - CM 2	4341	7	18,0	36,0	100
CP. W - CM 3	4342	11	24,1	44,0	125
CP. W - CM 4	4343	14	31,6	57,5	160
CP. W - CM 5	4344	18	44,7	70,5	200

DIN 806**CONTROPUNTE PER RETTIFICA CON METALLO DURO**

MT SHANK TAILSTOCKS FOR GRINDING WITH SOLID CARBIDE

CP.R

TIPO	Art.	D	E	L	L1	Lt
CP. R - CM 1	3959	7	12,2	26,5	22	80
CP. R - CM 2	4345	7	18,0	36,0	30	100
CP. R - CM 3	4346	11	24,1	44,0	38	125
CP. R - CM 4	4347	14	31,6	57,5	50	160
CP. R - CM 5	4348	18	44,7	70,5	73	200