




A6
NEUTRO

A SERIES

NORMA VERGNANO

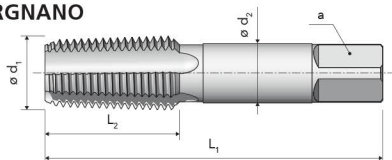

CAMPO D'IMPIEGO - VELOCITÀ DI TAGLIO m/min

ISO	MG	A6 NEUTRO			
P	P.2	● 10-15			
	P.3	● 10-12			
	P.4	● 8-10			
K	K.2	● 10-12			



Rc	P [Sp/1"]	Ød1 [mm]	L1 js 16 [mm]	L2 [mm]	L3 [mm]	Ød2 h9 [mm]	a h12 [mm]	z [-]	Ø [mm]	A6 NEUTRO A...0062H1LA0
1/8"	28	9,728	63	17,5	-	7	5,5	4	8,2 (a)	...V0180...
1/4"	19	13,157	63	23,5	-	11	9	4	11 (a)	...V0140...
3/8"	19	16,662	70	24	-	12	9	4	14,5 (a)	...V0380...
1/2"	14	20,955	80	29	-	16	12	4	18 (a)	...V0120...
3/4"	14	26,441	100	32	-	20	16	5	23,5 (a)	...V0340...
1"	11	33,249	110	36	-	25	20	5	29,5 (a)	...V1000...
1 1/4"	11	41,91	125	44	-	32	24	5	38 (a)	...V1140...
1 1/2"	11	47,803	140	46	-	36	29	6	44 (a)	...V1120...
2"	11	59,614	160	50	-	45	35	6	55,5 (a)	...V2000...

(a) = Preforo cilindrico (cfr pagina 264)